

EQUIPOS INTERNACIONALES LTDA.

EQUINTER[®]
www.equinter.co



XTR[™] Airless Spray Guns

Rugged Design to Handle the Toughest Protective Coatings



Built for Extreme Conditions

- Compact design allows for easy manoeuvrability
- XTR-5: maximum fluid pressure of 345 bar, 34.5 MPa (5000 psi)
- XTR-7: maximum fluid pressure of 500 bar, 50 MPa (7250 psi)
- Variety of handle and trigger options
- High quality materials and construction



Genuine Graco Fluid Hoses Make the Difference

Xtreme-Duty™ 310 bar (4500 psi) High Pressure Hose

Part #	Length	Hose Diameter	Female NPSM
H42503	0.9 m (3 ft)	6.4 mm (1/4 in)	1/4 in
H42506	1.8 m (6 ft)	6.4 mm (1/4 in)	1/4 in
H42510	3.0 m (10 ft)	6.4 mm (1/4 in)	1/4 in
H42525	7.6 m (25 ft)	6.4 mm (1/4 in)	1/4 in
H42550	15.2 m (50 ft)	6.4 mm (1/4 in)	1/4 in
H4251X	30.5 m (100 ft)	6.4 mm (1/4 in)	1/4 in
H43803	0.9 m (3 ft)	9.5 mm (3/8 in)	3/8 in
H43806	1.8 m (6 ft)	9.5 mm (3/8 in)	3/8 in
H43810	3.0 m (10 ft)	9.5 mm (3/8 in)	3/8 in
H43825	7.6 m (25 ft)	9.5 mm (3/8 in)	3/8 in
H43850	15.2 m (50 ft)	9.5 mm (3/8 in)	3/8 in
H4381X	30.5 m (100 ft)	9.5 mm (3/8 in)	3/8 in
H45010	3.0 m (10 ft)	12.7 mm (1/2 in)	1/2 in
H45025	7.6 m (25 ft)	12.7 mm (1/2 in)	1/2 in
H45050	15.2 m (50 ft)	12.7 mm (1/2 in)	1/2 in
H4501X	30.5 m (100 ft)	12.7 mm (1/2 in)	1/2 in

Xtreme-Duty™ 386 bar (5600 psi) High Pressure Hose

Part #	Length	Hose Diameter	Female NPSM
H52503	0.9 m (3 ft)	6.4 mm (1/4 in)	1/4 in
H52506	1.8 m (6 ft)	6.4 mm (1/4 in)	1/4 in
H52510	3.0 m (10 ft)	6.4 mm (1/4 in)	1/4 in
H52525	7.6 m (25 ft)	6.4 mm (1/4 in)	1/4 in
H52550	15.2 m (50 ft)	6.4 mm (1/4 in)	1/4 in
H5251X	30.5 m (100 ft)	6.4 mm (1/4 in)	1/4 in
H53803	0.9 m (3 ft)	9.5 mm (3/8 in)	3/8 in
H53806	1.8 m (6 ft)	9.5 mm (3/8 in)	3/8 in
H53810	3.0 m (10 ft)	9.5 mm (3/8 in)	3/8 in
H53825	7.6 m (25 ft)	9.5 mm (3/8 in)	3/8 in
H53850	15.2 m (50 ft)	9.5 mm (3/8 in)	3/8 in
H5381X	30.5 m (100 ft)	9.5 mm (3/8 in)	3/8 in
H55010	3.0 m (10 ft)	12.7 mm (1/2 in)	1/2 in
H55025	7.6 m (25 ft)	12.7 mm (1/2 in)	1/2 in
H55050	15.2 m (50 ft)	12.7 mm (1/2 in)	1/2 in
H5501X	30.5 m (100 ft)	12.7 mm (1/2 in)	1/2 in

Xtreme-Duty™ 500 bar (7250 psi) High Pressure Hose

Part #	Length	Hose Diameter	Female NPSM
H72503	0.9 m (3 ft)	6.4 mm (1/4 in)	1/4 in
H72506	1.8 m (6 ft)	6.4 mm (1/4 in)	1/4 in
H72510	3.0 m (10 ft)	6.4 mm (1/4 in)	1/4 in
H72525	7.6 m (25 ft)	6.4 mm (1/4 in)	1/4 in
H72550	15.2 m (50 ft)	6.4 mm (1/4 in)	1/4 in
H7251X	30.5 m (100 ft)	6.4 mm (1/4 in)	1/4 in
H73803	0.9 m (3 ft)	9.5 mm (3/8 in)	3/8 in
H73806	1.8 m (6 ft)	9.5 mm (3/8 in)	3/8 in
H73810	3.0 m (10 ft)	9.5 mm (3/8 in)	3/8 in
H73825	7.6 m (25 ft)	9.5 mm (3/8 in)	3/8 in
H73850	15.2 m (50 ft)	9.5 mm (3/8 in)	3/8 in
H7381X	30.5 m (100 ft)	9.5 mm (3/8 in)	3/8 in
H75010	3.0 m (10 ft)	12.7 mm (1/2 in)	1/2 in
H75025	7.6 m (25 ft)	12.7 mm (1/2 in)	1/2 in
H75050	15.2 m (50 ft)	12.7 mm (1/2 in)	1/2 in
H7501X	30.5 m (100 ft)	12.7 mm (1/2 in)	1/2 in

Lightweight and Ergonomic

Technical Specifications

Maximum fluid working pressure	XTR-5: 345 bar, 34.5 MPa (5000 psi)
	XTR-7: 500 bar, 50 MPa (7250 psi)
Fluid orifice	2.3 mm (0.090 in)
Fluid inlet	1/4 npsm
Maximum fluid temperature	71° C (160° F)
Sound pressure	84.3dB(A)*
Sound power	95.7dB(A)*
Dimensions	XTR-5: Weight 411 g, Length 111 mm, Height 180 mm
	XTR-7: Weight 688 g, Length 111 mm, Height 180 mm
Wetted parts	Aluminum, stainless steel, polyethylene, polyurethane, polypropylene, nylon, acetal, carbide, solvent-resistant O-rings
Instruction Manual	312145

* Results are maximum readings taken at 414 bar, 41 MPa (6000 psi), with GHD519 tip, using water. Sound power level was tested to ISO 9614-2.

Ordering Information

XTR-5 Airless Spray Gun

Maximum working pressure:	345 bar, 34.5 MPa (5000 psi)
XTR500	25 mm round handle, four-finger trigger, no tip
XTR501	25 mm round handle, four-finger trigger, flat tip*
XTR502	Oval insulated handle, four-finger trigger, GHD RAC tip*
XTR503	Oval insulated handle, two-finger trigger, GHD RAC tip*
XTR504	25 mm round handle, four-finger trigger, GHD RAC tip*
XTR505	25 mm round handle, two-finger trigger, GHD RAC tip*
XTR506	22 mm round handle, four-finger trigger, GHD RAC tip*
XTR507	22 mm round handle, two-finger trigger, GHD RAC tip*

XTR-7 Airless Spray Gun

Maximum working pressure:	500 bar, 50.0 MPa (7250 psi)
XTR700	Round handle, four-finger trigger, no tip
XTR701	Round handle, four-finger trigger, flat tip*
XTR702	Oval insulated handle, four-finger trigger, GHD RAC tip*
XTR703	Oval insulated handle, two-finger trigger, GHD RAC tip*
XTR704	Round handle, four-finger trigger, GHD RAC tip*
XTR705	Round handle, two-finger trigger, GHD RAC tip*

*Includes 519 tip

Accessories

287450	2-finger trigger kit	246297	180° spray nozzle, 7/8-14 UNC-2B, 500 bar, 50 MPa (7250 psi)
287449	4-finger round trigger kit	248837	Gun repair kit, includes gasket, needle and seat
287451	4-finger oval insulation trigger kit	245994	GHD tip guard kit
246294	254 mm gun extension, 500 bar, 50 MPa (7250 psi)	287032	Filter, 60 mesh, included in every gun
246295	380 mm gun extension, 500 bar, 50 MPa (7250 psi)	287033	Filter, 100 mesh
246296	457 mm gun extension, 500 bar, 50 MPa (7250 psi)	287034	Filter, 60 and 100 mesh combination

Quality Features for Ultimate Coatings Results

Needle Assembly and GHD RAC® SwitchTip™

- Exceptional life, pattern and finish
- Great for high solids coatings
- Factory set needle needs no adjustments

Variety of Handle and Trigger Options

- 2- and 4-finger trigger options
- Oval-insulated or round handle
- Lightweight trigger pull

Easy Out™ Gun Filter


- Reduces tip plugs
- Eliminates collapsed filters
- Provides more filtration area

Trigger Guard

- Easily detaches for access to filter
- Acts as a wrench to remove filter from gun handle
- Small profile sprays in tight areas

EasyGlide™ Swivel

- Allows easier gun movement under high pressure

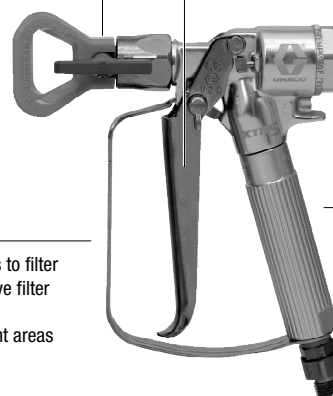

EQUIPOS INTERNACIONALES LTDA.

EQUINTER®
www.equinter.co

Av. Carrera 50 N° 4C - 34, Bogotá, Colombia.

PBX: (57-1) 744 2739 Móvil: 312 4389725

ventas@equinter.co